



10/535 143  
Rec'd PTO 17 MAY 2005



INVESTOR IN PEOPLE

#2

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.



I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed *Andrew Gersey*  
Dated 23 August 2005

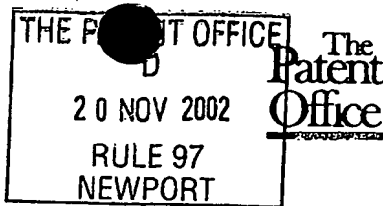

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference **CM00441C/DJM/GBRI//LCC/DOLGOV/OS**

2. Patent application number **0227204.5**  
(The Patent Office will fill in this part)

3. Full name, address and postcode of the or of each applicant (underline all surnames) **MOTOROLA, INC**  
**1303 EAST ALGONQUIN ROAD,**  
**SCHAUMBURG, ILLINOIS 60196,**  
**U.S.A.**

Patents ADP number (if you know it) **08281107001**

If the applicant is a corporate body, give the country/state of its incorporation **U.S.A.** **DELAWARE**

4. Title of the invention **WIRELESS COMMUNICATION SYSTEMS AND METHODS**

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

*Optimum Consulting*  
*111 York Close*  
*Chesham Court*  
*Basingstoke*  
*RG24 8AG*

**DEREK J MCCORMACK**  
**EUROPEAN INTELLECTUAL PROPERTY DEPARTMENT**  
**MIDPOINT**  
**ALENCON LINK**  
**BASINGSTOKE**  
**HAMPSHIRE RG21 7PL**  
**UK**  
**ADP NO. 00001180006**

**8128241001**

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)
---------	--	-------------------------------------

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)
-------------------------------	-------------------------------------

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

☒ YES ☐ NO

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 20

Claim(s) 4

Abstract 1

Drawing(s) 3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 3

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 1

Any other documents 1 - x FEE SHEET  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

*Derek McCormack*

10/11/02

12. Name and daytime telephone number of person to contact in the United Kingdom

DEREK J MCCORMACK

Louise CRISTOFOLI

01256 790589

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

**WIRELESS COMMUNICATION SYSTEMS AND METHODS****Field of the Invention**

5 This invention relates to wireless communication systems and methods, particularly redundancy provision in a multi-zone wireless communication system and method. The invention is applicable to, but not limited to, redundancy provision in short data routers for use in  
10 handling Internet Protocol multicast mobility updates.

**Background of the Invention**

Wireless communication systems, for example cellular

---

15 telephony or private mobile radio communication systems, typically provide for radio telecommunication links to be arranged between a plurality of base transceiver stations (BTSS) and a plurality of subscriber units, often termed mobile stations (MSs).

20

In a wireless communication system, each BTS has associated with it a particular geographical coverage area (generally defined as a zone or a cell). Transmit power and receiver sensitivity of both the BTS and the  
25 plurality of MS served by the BTS defines the coverage area where the BTS can maintain acceptable communications with MSs operating within its serving cell. Typically, these cells combine to produce an extended coverage area, generally referred to as a 'zone'. For very large  
30 private mobile radio systems, the system will likely be

configured with multiple zones, to provide radio coverage over, say, a whole country.

One example of a zone-based wireless communication system is system designed in accordance with TERrestrial Trunked Radio (TETRA) standards, as defined by the European Telecommunications Standards Institute (ETSI). A primary application for TETRA equipment is communication by the emergency services, as TETRA provides a dispatch and control operation. The system infrastructure in a TETRA system is generally referred to as a switching and management infrastructure (SwMI), which substantially contains all of the system elements apart from the mobile units. This includes BTSS connected to a conventional public-switched telephone network (PSTN) through base station controllers (BSCs) and mobile switching centres (MSCs).

A known configuration is to use Zone Controllers to provide inter-zone and intra-zone communications, with the zone controllers located in clusters without the need for WAN links. In such a configuration, a zone controller is generally termed a Mobile Switching Office (MSO).

It is envisaged that TETRA systems will include a concept of one or more Short Data Router(s) (SDR) per MSO. In the context of the present invention, an MSO can be considered as consisting of a number of zones. One or more SDRs located in the MSO will serve the MSs that are

currently registered with the respective MSO. Hence,  
each SDR will serve one or more assigned zones.

In particular, each SDR maintains a mobility database  
5 that tracks the served MSS' location within the zone(s)  
supported by the respective SDR. The database is  
effectively a copy of the zone controller (ZC) mobility  
database. The ZC's database is constructed from the  
mobility information provided by all of the respective  
10 MSS within the communication system.

An identified problem in the application of SDRs within  
their respective MSOs is that failure of one SDR leaves  
all MSS in the zones that were served by the failed SDR  
15 without a Short Data service.

A first method, generally used to address reliability  
(failsafe) problems, is a '2N' hardware redundancy  
solution. This solution effectively provides a second  
20 functional unit that waits in an operational standby mode  
until the primary unit fails. Upon failure of the  
primary unit, the waiting, fully functional, secondary  
unit is switched in - generally termed 'hot switchover'.

25 The main recognised disadvantage of a '2N' hardware  
redundancy solution is that the system is equipped with  
duplicate hardware modules, thereby significantly  
increasing the cost. When the duplication is used  
throughout large, multi-zone systems, the '2N' solution  
30 is impractical.

However, in the context of the present invention, the primary problem is the requirement to update, on a real time basis, the MS location information in a back-up SDR. This is envisaged to be a significant problem, as only  
5 the primary SDR receives location updates from the ZC. Therefore, to implement a hot switchover in a 2N redundant system, the MS location database within the primary SDR must continually synchronize and update data with the corresponding location database in the standby  
10 (secondary) SDR.

It is known that synchronisation of such databases is a complicated and load heavy task. Hence, the database information has to be copied from the primary (active)  
15 SDR's database to the secondary SDR's database in a real-time manner. This effectively means that each and every update of the main location database has to be immediately replicated, in a reliable manner, by the primary SDR and transmitted to the backup database in the  
20 secondary SDR.

Hence, the 2N SDR (and therefore location database) solution requires a significant amount of resource and processing power. Furthermore, the above synchronisation  
25 process is a complex operation, as several SDR may track MS location information in many zones, with each primary SDR needing to manage the location database back-up operation of their respective secondary SDRs.

30 FIG. 1 shows a known mechanism for redundancy provision in a simplistic representation of a wireless

communication system 100. The communication system includes a zone controller (ZC) 110 that is operably coupled to a SDR 122. A second SDR 124 is operably coupled to the ZC 110 and provides a back-up SDR function for the first SDR 122. In this manner, the second SDR 124 receives mobility location information from the primary SDR, whenever the primary SDR receives a mobility location information update.

- 10 A second method sometimes used to attempt to address reliability (failsafe) problems, is a 'N+1' load-sharing solution. This solution effectively provides a single additional functional unit. The functional requirements of the system are shared between the requisite number of
- 
- 15 hardware modules, and this additional hardware module, to provide some capacity in the functional units in the system. Upon failure of a hardware module, the traffic load supported by that hardware module is distributed amongst the remaining 'N' hardware modules. This
- 20 solution does not require as many hardware modules to be installed, as there is no requirement for multiple back up functional units. However, it is prone to the potential problem of any further hardware module failure leaving the system unable to cope with two modules out of
- 25 commission.

This solution also suffers from the problem of updating the respective mobility location databases when the methodology is applied to secondary SDRs having back-up

30 mobility location databases.



In contrast to the 2N system, the 'N+1' solution will no longer require the SDRs to self-synchronise their respective databases. In a 'N+1' system, the ZC maintains a real-time, up-to-date knowledge of all of the SDR topology and their respective MS location information. In this regard the ZC sends a duplicate transmission to the primary SDR and its corresponding secondary SDR, with the same MS location database information. Clearly, this is far from an optimal arrangement.

However, the inventors of the present invention have recognised a further problem with the load-sharing 'N+1' solution when considered in the aforementioned SDR context. Namely, a 'N+1' solution requires more connections to the sites served by the SDRs in addition to many more links between the SDRs and the ZC to receive dedicated location database information. This results in increased connection costs and required processing power.

Notably, in scenarios where one or more SDRs is performing a primary role for a number of its associated zones/sites, as well as a secondary role for a number of other zones/sites, the dedicated download process becomes very complex. Furthermore, the dedicated download process is processor hungry and time consuming. Consequently, the integrity of the dedicated download location information decreases in its reliability.

Thus, in summary, load sharing is generally a desirable feature in large systems, to balance resource use between

zones upon a unit failure. Such a load-sharing arrangement causes difficulty in the case of simultaneously updating a back-up SDR (and its mobility location database(s)) as the back-up SDR will also need  
5 to seamlessly and immediately replace the operation of the failed main SDR. This is a particularly acute problem when many SDRs are providing a back-up service to a number of other SDRs. Furthermore, in the full load-shared configuration of all SDRs connected to all sites,  
10 there is a requirement to maintain too many links between the SDRs and ZC(s) that remain idle. This leads to an inefficient and unproductive use of each SDR.

---

A need therefore exists for an improved redundancy

15 mechanism, particularly to maintain integrity in mobility location information when there is a SDR failure in a multi-zone communication system, wherein the abovementioned disadvantages may be alleviated.

20 **Statement of Invention**

In accordance with a first aspect of the present invention there is provided a wireless zone-based communication system that includes a plurality of zones  
25 being served with short data capabilities by a plurality of short data routers. At least one zone controller from a number of zone controllers transmits a multicast mobility update message to the plurality of short data routers, such that at least one short data router is able  
30 to generate one or more mobility databases for mobile units that are operational in the one or more zones the

short data router serves. Preferably, the short data router serves as a primary and/or secondary (back-up) and/or load sharing short data router.

- 5 In accordance with a second aspect of the present invention, there is provided a method for improving redundancy provision in a wireless zone-based communication system, as claimed in Claim 9.
- 10 In accordance with a third aspect of the present invention, there is provided a zone controller, as claimed in Claim 12.

---

In accordance with a fourth aspect of the present

- 15 invention, there is provided a short data router, as claimed in Claim 13.

Further aspects of the invention are provided in the dependent Claims.

20

- In summary, the inventive concepts described herein provide a mechanism to ensure that all short data routers are simultaneously provided with the same mobility update information, by multicast transmissions of, preferably,
- 25 mobility location information from the one or more zone controllers. The maintenance of the mobility databases in each of the short data routers, whether primary, back up or load-shared, is therefore accurate and synchronised.

30

**Brief Description of the Drawings**

FIG. 1 shows a simplistic representation of a known  
mechanism for redundancy provision in a wireless  
5 communication system.

Exemplary embodiments of the present invention will now  
be described, with reference to the accompanying  
drawings, in which:

10

FIG. 2 illustrates a simplistic representation of a  
mechanism for redundancy provision in a wireless zone-  
based communication system adapted to support the various  
inventive concepts of the preferred embodiment of the  
15 present invention;

FIG. 3 illustrates a zone-based system architecture,  
adapted to implement the preferred embodiment of the  
present invention; and

20

FIG. 4 illustrates a message sequence chart of the  
preferred multicast mobility update message operation of  
the preferred embodiment of the present invention.

**25 Description of Preferred Embodiments**

In the context of the present invention, a multicast  
message is transmitted to SDRs from a plurality of zone  
controllers. It is within the contemplation of the  
30 invention that the multicast message, sent to the SDRs,  
may encompass any information required by the SDRs to

provide an acceptable back-up or load-sharing function for other SDRs. However, in the preferred embodiment of the present invention, the multicast message includes mobility and/or location information relating to MSs  
5 operating within the respective zones. The message may include general information, updated information, or a complete mobility or location database.

Furthermore, it is within the contemplation of the  
10 present invention that, in general any information that changes frequently and is needed by more than one entity is a candidate for use with the inventive concepts herein described. For example, this would include any radio related parameters, such as radio status (ON/OFF)  
15 information, or any other user-radio association. Hereinafter, the term 'multicast message' is to be viewed as covering any or all of the above definitions.

Referring first to FIG. 2, a simplistic representation of  
20 a mechanism for redundancy provision in a wireless zone-based communication system, is illustrated. For example, the system is one that supports a TERrestrial Trunked Radio (TETRA) air-interface. The European Telecommunications Standards Institute (ETSI) has defined  
25 the TETRA air-interface. Generally, the air-interface protocol is administered from base transceiver sites (BTSSs) that are geographically spaced apart - one BTS supporting a cell or, for example, sectors of a cell. A number of cells are linked to form a number of zones.  
30 Five zones 150, 152, 154, 156, 158 only are illustrated.

A zone controller 210 controls communication in, and between, zones.

A number of short data routers (SDRs) 220, 222, 224 are  
5 arranged to provide router functionality between external  
data hosts, such as the Internet, accessible by wireless  
TETRA MSs via a public switched telephone network (PSTN)  
or a public data network (PDN) gateway 250. Each SDR  
220, 222, 224 is connected (not shown) to every other  
10 SDR. Each SDR 220, 222, 224 is a host independent  
application, which connects to the short data transport  
service (SDTS) connection management layer, as defined by  
the TETRA standard procedures. The SDTS provides an  
unreliable message relay service.

---

15 -

The SDR 220, 222, 224 also provides routing capabilities  
for MS data terminal equipment (DTE) applications through  
the infrastructure. The addressing capabilities offered  
by the SDTS allow MS-MS messaging, either directly or  
20 through a server located at the infrastructure. This  
effectively provides a client/server structure, which can  
be used to provide reliable message transportation.

It is envisaged that one SDR is able to route messages  
25 between, say one hundred sites in ten zones and between  
ten SDRs in ten zones. Thus, for large multi-zone/site  
systems, the operation of one or more SDRs can become  
very complex. Hence, three zones are shown in FIG. 2 for  
explanatory purposes only. A skilled artisan will  
30 appreciate that many other configurations and number of

SDRs can be utilised to benefit from the inventive concepts hereinafter described.

In accordance with the preferred embodiment of the present invention, in order to resolve the problem of mobility location database updating, a redundancy scheme using multicasting is employed. In this manner, the zone controller 210 sends out a multicast message 240 to all SDRs. The multicast message 240 includes the MS mobility or location information in the form of a database or updates or any other form for all MSs operating in the various zones. Hereinafter, the term "MS mobility information" will be used to cover the various content options of the multicast message. Thus, mobility location information in primary and/or secondary (standby) and/or load sharing SDRs is continuously updated.

FIG. 2 indicates one of many possible topologies that can benefit from the multicasting (parallel-updating) mechanism. In the configuration of FIG. 2, each of the SDRs 220, 222, 224 are arranged to back up one or more other SDRs. In this manner, following a SDR failure, the remaining SDRs will take over all (or only a part) of the SDR functionality for the zone or zones being served by the failed SDR. For example, if the second SDR 222 fails, the first and third SDR 220, 224 are arranged to provide back-up functions for zone 3 - the zone primarily supported by the failed SDR 222. In this regard, the operation of the failed SDR will be shared between, or taken over by one of, the first and third SDRs 220, 224.

Advantageously, in accordance with the preferred embodiment of the present invention, the first and third SDRs 220, 224 have accurate, synchronised and updated MS mobility information, following receipt of multicast messages from the zone controller 210 (and other zone controllers 260 to all SDRs.

Every SDR 220, 222, 224 that is not dependent upon other SDRs maintains a database of mobility information of MSs in the served (and back-up) zones. In this regard, the ZC(s) 210 sends out multicast messages to specific multicast group addresses. SDRs obtain the MS mobility information by joining the respective multicast groups.

---

In particular, the backup SDR, for example first and third SDRs 220 and 224 are configured to join the multicast groups associated with zone 3. In a similar manner, other SDRs (not shown) may be configured as back-up SDRs for the zones 1, 2, 3. Thus, each back-up SDR is able to maintain an up-to-date MS mobility (and/or location) database by joining the multicast groups that are used by the particular (main) SDR to receive the mobility information from the ZC.

It is known that in such a radio system every MS is registered with the BTS that the MS is located in. This registration information is sent to the ZC home location register (HLR)/vesting location register (VLR) database. As soon as the MS changes its location from one BTS to another BTS, this update of location is sent to the ZC.



In summary, in accordance with the preferred embodiment of the present invention, when the ZC receives a location information update from the BTS that served, or is about to serve, the MS, the ZC sends this information to the  
5 specific multicast address. The specific multicast address is pre-configured in the IP network. All SDRs (both primary and backup) who are interested in this information join this multicast group. In this manner, all the respective SDRs receive copies of location update  
10 messages sent by ZC to the multicast group.

Advantageously, by using a multicast approach to SDR mobility database management, for both primary and backup SDRs, there is no need to perform individual

---

15 synchronisation of primary and back-up SDR databases. This is due to the fact that all SDRs receive the MS mobility information simultaneously from the same sources. In other words, the present invention avoids the need for the primary SDR to replicate the MS mobility  
20 information and transmit it as frequently as possible to the respective back-up SDR(s) in a reliable manner.

In a preferred embodiment of the present invention, a location query mechanism is utilised whenever the  
25 multicast message proves to be inaccurate, e.g. should a link between a ZC and an SDR fail. In this preferred embodiment, the SDR directly queries the ZCs home location register (HLR) and/or visitor location register (VLR) to obtain accurate MS mobility information.  
30 However, it should be noted that the chances of the SDRs becoming unsynchronised in this manner are very low when

the primary and backup SDRs are able to be located on the same local area network (LAN).

An additional advantage of the proposed solution is that  
5 the redundancy scheme can be dynamically reconfigured amongst the SDRs, i.e. in an "on the fly" manner. Thus, an SDR can be quickly and dynamically assigned as a back up SDR, perhaps following another SDR failing and the re-distribution of SDR resources being unbalanced, to listen  
10 to the new ZC multicast messages.

Notably, the invention addresses the problems in scenarios where a dedicated download process is used. Here, the integrity of the dedicated download location  
15 information may become more unreliable. In such a scenario, this problem is resolved by use of multicast for mobility updates, using a protocol based on the multicast (UDP) that is connectionless. If there are no extra connections to maintain, then implicitly there is  
20 no extra, unproductive performance consumption of the SDR. Additionally, the ZC sends only one copy of mobility information to all SDRs.

A preferred application of the present invention is for  
25 use with Internet Protocol (IP) multicast messages. In this regard, an IP multicast capable network provides the mechanisms to replicate and deliver messages to all SDR that are joined to a specific, predefined multicast address. Nevertheless, it is within the contemplation of  
30 the invention that any other multicast messaging approach could utilise the aforementioned inventive concepts.

Referring now to FIG. 3, a zone-based system architecture 300 is shown, adapted to implement the preferred embodiment of the present invention. As shown, every ZC 320, 322, 324 is inter-connected to facilitate inter-zone and intra-zone calls, with one ZC supporting one zone. A ZC 320, 322, 324 is also connected to every Tetra site controllers (TSC) in a zone. Also, it is likely that a number of the ZCs 320, 322, 324 could have a PSTN gateway, to enable MSs to access external data or telephone networks.

Every SDR 220, 222 is connected to every other SDR for inter-SDR routing (although only two SDRs are shown for clarity purposes). The SDRs 220, 222 are connected to a number of TSCs in the zones they serve, for example SDR 222 in zone 3 is connected to TSCs 340, 342. Following the arrangement in FIG. 2, SDR 222 serving zone 3 is also configured to be back-up for SDR 220 with regard to zones 1 150 and zone 2 152. SDR 220 is also providing a back up for SDR 222 with respect to zone 3 154. Other SDRs serving other zones, and providing further back-ups for the three zones indicated, are not shown for clarity purposes only.

TSCs 340-348 are respectively coupled to BTSs 350-364 that provide a wireless (air-interface) link with MSs 370-376, which may be coupled to a computing terminal such as a personal computer 380, 382. In this configuration, each SDR obtain MS mobility information from all the ZCs in the zones that the SDR is serving.

This information is distributed, as described above, in a multicast message.

The multicast message is preferably generated and distributed, as shown in the message sequence chart 400 of FIG. 4. Notably, MS mobility information is delivered to SDRs in a real time and synchronised manner. Each of the ZCs, for example ZC 210, transmits a MS mobility information message to a predefined multicast address in the network. All SDRs interested in this information join the multicast group defined by this multicast address. In this manner, the IP network knows to which hosts (SDRs) it shall distribute this information. In addition, the Network also knows where the SDRs are located.

A mobility information message travelling through the network towards the SDR would likely pass through a number of routers. It is envisaged that some of these routers may be one or more replication points 310. A router, functioning as a replication point 310, receives the MS mobility information message from the ZC and replicates the message a required number of times. The number of replications is dependent upon the number of SDRs that are associated with/joined to the group identified in the MS mobility information message. The replication point 310 then transmits the multicast message to the primary SDR 220. The replication point 310 also transmits the multicast message to all other back-up SDRs, for example SDR 224. These transmissions are performed simultaneously, i.e. in a multicast manner,

so that the integrity of the mobility data between the SDRs is maintained.

It is within the contemplation of the invention, as will  
5 be appreciated by a person skilled in the art, that many  
other architecture configurations could benefit from the  
multicast messages described above. For example, a  
skilled artisan would appreciate that the multicast-  
messaging concept in a SDR redundancy scenario is  
10 applicable to any of a number of SDR-ZC architectures.  
Furthermore, although, the preferred embodiment of the  
present invention has been described with respect to IP  
multicasting in a TETRA system, it is envisaged that it  
is equally applicable to mobility messages in a cellular  
15 communication system, or any other mobile radio system.

Indeed, it is envisaged that the inventive concepts  
herein described can be applied to any system having a  
need for redundancy, where information related to the  
20 efficient operation of the system changes frequently.  
For example, in a case where a redundant ZC concept is  
applied, then information updates for the BTS to a  
primary ZC and a backup ZC can be effected utilising the  
aforementioned inventive concepts.

25 Furthermore, the inventive concepts are applicable to a  
system that uses a switching matrix, such as a telephone  
exchange, where a redundant Management unit controls the  
switch. In this scenario, the information relating to  
30 established or released connections has to be relayed to  
the Management unit. The inventive concepts described

above can therefore be used to provide distribution of this information from switching matrix towards both a main Management unit and any redundant Management units.

- 5 It will be understood that the short data router redundancy mechanism for MS mobility tracking, as described above in accordance with an embodiment of the invention, provides at least the following advantages:

(i) The mechanism provides all SDRs simultaneously  
10 with the same MS mobility information, due to regular multicast message transmissions from the zone controller(s).

(ii) The maintenance of the MS mobility location information/databases in each of the SDRs is therefore  
15 accurate and synchronised.

(iii) There is no need to provide further messages between primary and secondary (back-up) SDRs, to ensure that the back-up SDR contains the same MS mobility information as the primary SDR.

20 (iv) Every SDR is configured to manage their own MS mobility location databases, and is therefore not reliant upon MS mobility information being regularly provided from other SDRs.

(v) The SDR redundancy scheme can be dynamically  
25 reconfigured amongst the SDRs, for example when one or more SDR failures leaves the remaining SDR functionality across the system unbalanced.

(vi) As multicast based distribution of information is connectionless, there is a benefit in  
30 providing a low number of connections to the SDR. In this regard, a SDR does not have to maintain a connection

to every zone controller from where it receives mobility information.

(vii) In a dedicated download process, the integrity of the dedicated download location information  
5 is maintained.

Whilst specific, and preferred, implementations of the present invention are described above, it is clear that one skilled in the art could readily apply variations and  
10 modifications of such inventive concepts.

Thus, an improved mechanism for providing redundancy to short data routers, in particular tracking MS mobility data across a number of zones has been described, wherein  
15 the aforementioned disadvantages associated with prior art mechanisms have been substantially alleviated.

**Claims**

1. A wireless zone-based communication system comprising a plurality of zones being served with short data capabilities by a plurality of short data routers, wherein the plurality of short data routers are operably coupled to a plurality of zone controllers, the wireless zone-based communication system being characterised by:  
at least one zone controller of said plurality of zone controllers being operable to transmit a multicast message to a plurality of said short data routers such that at least one short data router of the plurality of said short data routers (220-224) is operable to generate or update information relating to mobile communication units that are operational in the one or more zones that the short data router serves.
2. The wireless zone-based communication system according to Claim 1, wherein the plurality of said short data routers are operable to generate or update mobility information relating to said mobile communication units.
3. The wireless zone-based communication system according to claim 1 or claim 2, wherein the plurality of said short data routers (220-224) are operable to generate or update information relating to said mobile communication units that are operational in the one or more zones that the plurality of said short data routers serve as a primary and/or secondary (standby) and/or load sharing short data routers.



4. The wireless zone-based communication system according to any one of the preceding claims, wherein the at least one zone controller is operable to transmit a multicast message to a multicast group address  
5 identifying a group joined by said at least one short data router.

5. The wireless zone-based communication system according to any one of the preceding claims, wherein the  
10 at least one short data router is operable to utilise a location query mechanism to minimise inaccuracies in the multicast message.

6. The wireless zone-based communication system  
15 according to claim 5, wherein the location query mechanism includes said at least one short data router being operable to query directly a zone controller's home location register and/or visitor location register to obtain mobile unit mobility information when inaccurate  
20 mobility information has been received in the multicast message.

7. The wireless zone-based communication system according to any one preceding claim, wherein said  
25 multicast message comprises an Internet Protocol (IP) mobility message to maintain synchronised IP address records of mobile communication units operating in the wireless zone-based communication system.

8. The wireless zone-based communication system according to any one of the preceding claims, wherein said communication system is a trunked radio system.
- 5 9. The wireless zone-based communication system according to claim 8, wherein said communication system is operable in accordance with TETRA standard procedures.
- 10 10. A method for improving redundancy provision in a wireless zone-based communication system comprising a plurality of zones being served with short data capabilities by a plurality of short data routers, the method being characterised by the steps of:
- 
- 15 transmitting a multicast message from a zone controller to a plurality of short data routers;  
receiving said multicast message at one of said plurality of short data routers; and  
generating, by said short data router, one or more mobility databases for mobile units that are operational  
20 in the one or more zones served by said short data router.
11. The method according to claim 10, wherein the step of generating one or more mobility databases is performed  
25 by said short data router serving as a primary and/or secondary (standby) and/or load sharing short data router.
12. The method for improving redundancy provision in a  
30 wireless zone-based communication system according to claim 10 or claim 11, wherein the step of transmitting

includes transmitting a multicast message to a multicast group address identifying a group joined by said at least one short data router.

- 5 13. A zone controller adapted to transmit a multicast message to a plurality of said short data routers in a communication system according to any one of of claims 1 to 9 or the method according to any one of claims 10 to 12.

10

14. A short data router adapted to receive a multicast message from a zone controller in a communication system according to any one of claims 1 to 9 or a method according to any one of claims 10 to 12.

---

15

15. A wireless zone-based communication system according to claim 1 and substantially as hereinbefore described with reference to, and/or as illustrated by, the accompanying drawings.

20

15. A method according to claim 10 substantially as hereinbefore described with reference to, and/or as illustrated by, the accompanying drawings.


**Abstract****REDUNDANCY PROVISION**

- 5 A wireless zone-based communication system (200, 300) includes a plurality of zones (150-158) being served with short data capabilities by a plurality of short data routers (220-224). At least one zone controller (210) from a number of zone controllers transmits a multicast  
10 message (430, 440) to the plurality of short data routers (220-224). At least one short data router (220) is able to generate or update information relating to mobile communication units that are operational in the one or more zones the short data router (220) serves.
- 15 Preferably, the short data router serves as a primary and/or secondary (back-up) and/or load sharing short data router. A method for improving redundancy provision in a wireless zone-based communication system (200, 300), a zone controller (210) and a short data router (220) are  
20 also described.

This mechanism ensures that all short data routers are simultaneously provided with the same mobility information, due to continuous multicast message  
25 transmissions from the zone controllers. The maintenance of the mobility databases in each of the short data routers is therefore accurate and synchronised.

{FIG. 2 to accompany abstract}

**FIG. 1**  
**Prior Art**

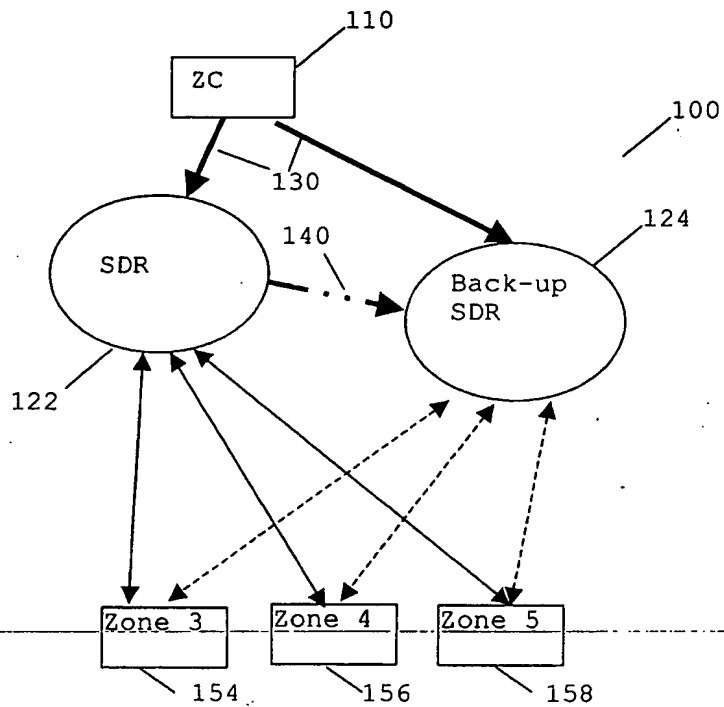

**FIG. 2**

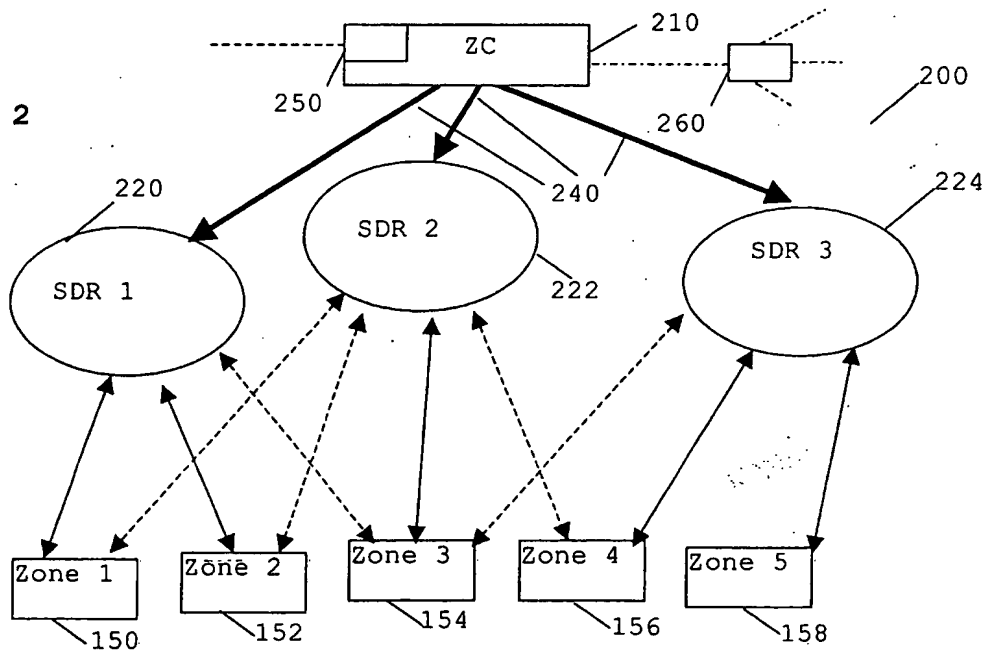


FIG. 3

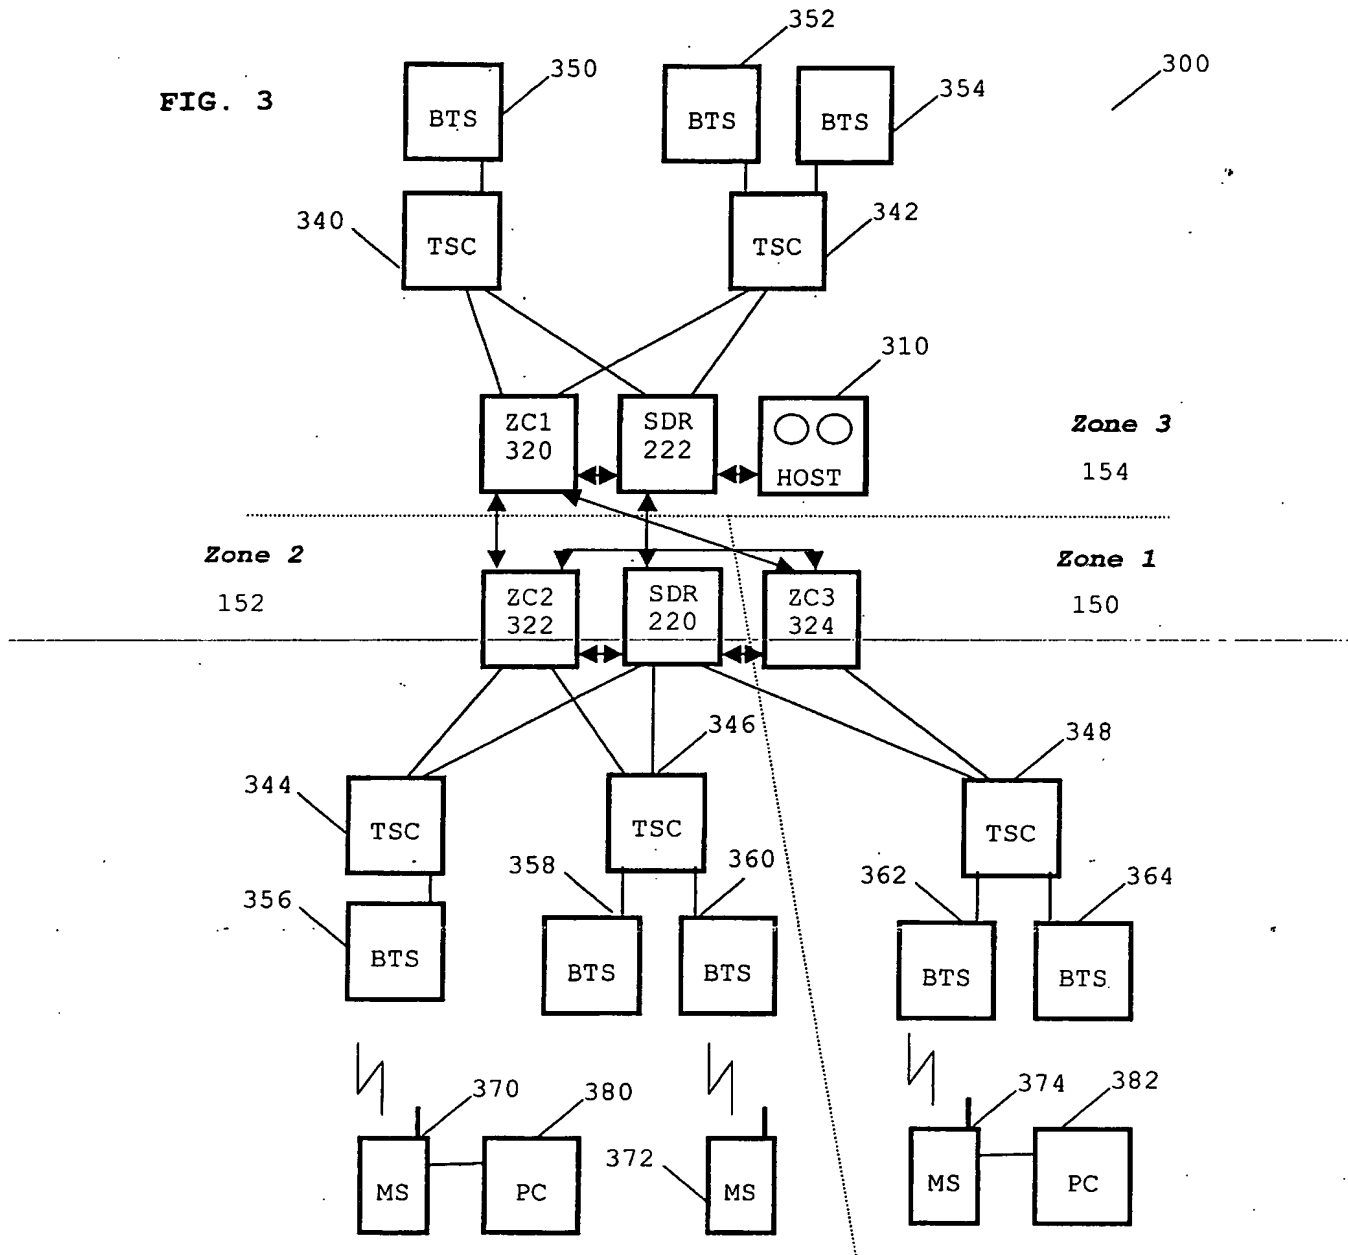


FIG. 4

